

Slot Pins for Inspection Components

Straight, Handle Length Fixed

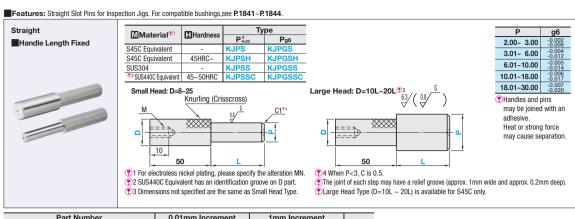


Pa	art Number		0.01mm Increment	1mm Increment	
	pe	D	. Р	L	M
(P _{-0.02})	(Pg6)		Configurable	Configurable	
(S45C)	(S45C)	8	2.00~ 6.00		M4
KJPS	KJPGS	10	2.00~ 8.00	(When P<8)	M5
		12	4.00~10.00	5~40 (When P≥8)	M5
(S45C Hardened)	(S45C Hardened)	16	8.00~14.00	5~50	M5
KJPSH	KJPGSH	20	10.00~18.00		M5
(SUS304)	(SUS304)	25	15.00~23.00	For SUS304	M5
KJPSS	KJPGSS	10L	10.00~16.00	L≤Px5	M5
		12L	12.00~20.00	For longer pins,	M5
(SUS440C)	(SUS440C)	16L	16.00~25.00	≅ F. 1027.	M5
KJPSSC	KJPGSSC	20L	20.00~30.00		M5

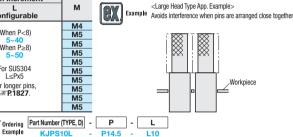

	P _{0m}	P _{a6}

D			P.:	0.02		P _{g6}			
	D		KJPSH	KJPSS	KJPSSC	KJPGS	KJPGSH	KJPGSS	KJPGSSC
	8								
	10								
0	12								
Small Head	16								
	20								
	25								
	10L			-	-			-	-
Large	12L			-	-			-	-
Head	16L			-	-			-	-
	20L			-	-			-	-

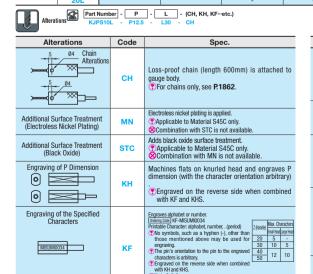

Alterations	Code	Spec.		
L Dimension Tolerance	LKC	Changes L dimension tolerance to ±0.05. [Outering Code: LKC When the LKC is used, 0.1mm increment can be specified for L Dimension. \$\mathbb{C} L < 30		
No Relief Groove	No Relief Groove NMN Omits the relief groove between knurled pstraight part on the step. ⊗Not applicable to Large Head Type.			
Handle Length	zc	Changes handle length 50 to 10, 20, 30 or 40. Owners (Down ZC20 'Z dimension 10 and 20 are only available when P≥5 and pin length L≤30. 'Applicable to SUS304, SUS440C only. 'Applicable to SUS304, SUS440C only. 'For Large Head' Type, only ZG30 and 40 are applicable.		
Tapered Tip	STT	Tapers the tip. (#Applicable when L≥10. (#Applicable when L≥10. P m included in that of L. P m m 2.00-3.00 1 3.01-6.00 2 6.01-1.000 3 1.001-20.00 4		
Air Vent 0.2	ABT	Adds air vent to P dimension.		


Caution when making alterations to engraving (KH, KF)



If the pin and the knurled part are joined with an adhesive, 10mm of the tip is not machined flat because the tip is thin.

Slot Pins for Inspection Components

Straight, Handle Length Selectable

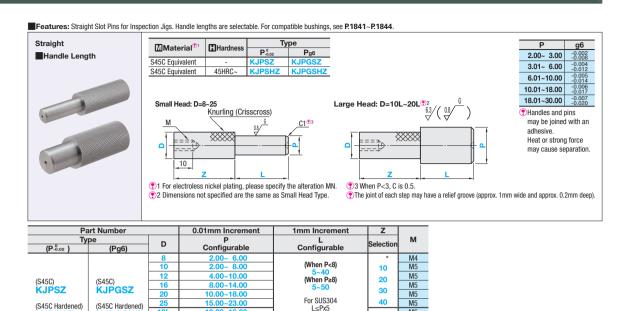

For longer pins.

D		P.S	0.02	P _{g6}		
		KJPSZ	KJPSHZ	KJPGSZ	KJPGSHZ	
	8					
	10					
Small Head	12					
Siliali neau	16					
	20					
	25					
	10L					
Large	12L					
Head	16L					
	20L					



Alterations	Code	Spec.
5 04 Chain Alterations	СН	Loss-proof chain (length 600mm) is attached to gauge body. (*) For chains only, see P.1862.
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied. PApplicable to Material S45C only. Combination with STC is not available.
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment. • Applicable to Material S45C only. • Combination with MN is not available.
Engraving of P Dimension O O O	КН	Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary) . Not applicable to handle length 10. Flagraved on the reverse side when combined with KF and KHS.
Engraving of the Specified Characters	KF	Engraves alphabet or number: Covere Cool KT-MISUM00034 Telephabet or number

Alterations	Code	Spec.		
L Dimension Tolerance	LKC	Changes L dimension tolerance to ±0.05. [Indexeng Code] LKC (*) When the LKC is used, 0.1mm increment can be specified for L Dimension. (*) L<30		
No Relief Groove	NMN	Omits the relief groove between knurled part and straight part on the step. Not applicable to Large Head Type.		
Tapered Tip	STT	Tapers the tip. **Capitable when L310: The largel by in 6 is included in that of L **P m m 2.00-3.00 1 1 3.01-6.00 2 6.01-10.00 3 1.001-20.00 4		
Air Vent 0.2	ABT	Adds air vent to P dimension.		

§ Tapped holes are not provided on products with Z=10. * Z dimension 10 and 20 are only available when P≥5 and

pin length L≤30.

Caution when making alterations to engraving (KH, KF)

The pin and the knurled part are joined with an adhesive 10mm of the tip is not machined flat because the tip is thin.