
Tapped Pins for Inspection Jigs

Slot Pins for Inspection Components

Tapered / Tapered, No Step

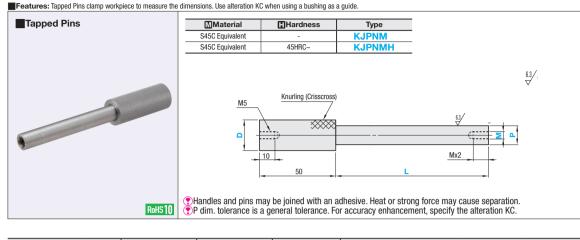


Part Number		P 0.01mm Increment	L 1mm Increment	M (P-4≥M) Selection	Unit Price			
Type D	KJPNM				KJPNMH			
туре	U		initial indication	Selection	L10~100	L101~150	L10~100	L101~150
	10	8.00~10.00	When P<12 10~100 When P≥12 10~150	4 5 6 8 10		-		-
(S45C) KJPNM (S45C Hardened) KJPNMH	12	8.00~10.00				-		-
	16	8.00~14.00						
	20	10.00~18.00						
	25	14.00~23.00						


For D10, knurling may extend slightly to the pin part when difference from P dimension is none or small.
Image: Part Number (TYPE, D) - P - L - M










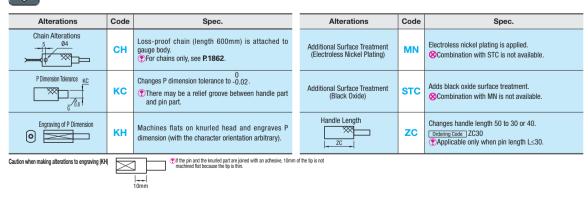

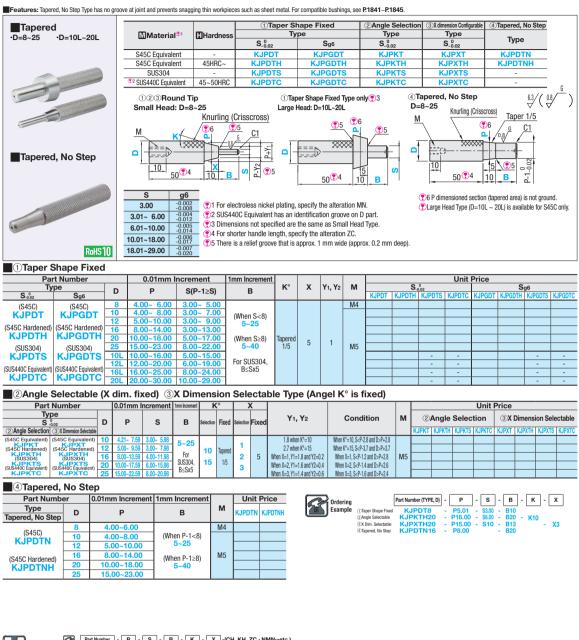

Alterations		- S - B - K - X -(CH, KH, ZC · NMN···etc - S10.00 - B15 - NMN - B10 - ZC30 - KF- KJPDTN10	.)
Alterations	Code	Spec.	
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied. • Applicable to Material S45C only. • Combination with STC is not available.	Han
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment. PApplicable to Material S45C only. Combination with MN is not available.	
Engraving of the Specified Characters	KF	Engraves alphabet or number : Detroit QOS K-MISUM0002 + What Robache thankle registring to the second sec	Cha
Engraving of P Dimension	КН	Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary). Solvot applicable to handle length 10. © Engraved on the reverse side when combined with KF.	

Alterations	Code	Spec.
Handle Length	zc	Changes handle length 50 to 10, 20, 30 or 40. © For handle length 10, there is no tapped hole. • Handle length 10 or 20 is available when P≥5 and pin length (10+8 or L+10) < 30. • For Large Hard Type, only 2C30 and 40 are applicable. © For handle length 10, combination with KH and KF is not available.
Chain Alterations	СН	Loss-proof chain (length 600mm) is attached to gauge body. For chains only, see P:1862 .