
## **Slot Pins for Inspection Components**

**Diamond Tapered - Diamond Fixed** 

## **Slot Pins for Inspection Components**

**Diamond Tapered - Diamond Configurable** 

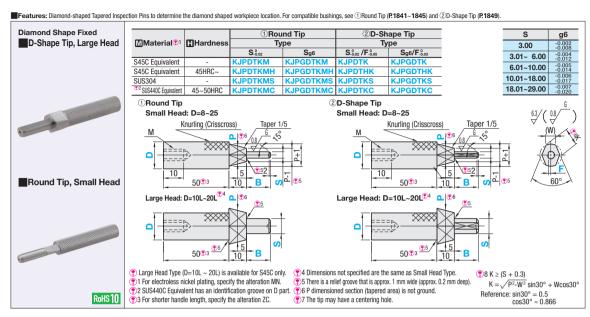

	Pa	art Number			0.01mm li	ncrement	0.1mm Increment	1mm Increment		
			②D-Shape Tip		P	S(P-1≥S)	_ F(F <s 2)<="" th=""><th>В</th><th>(W)</th><th>M</th></s>	В	(W)	M
S.0.02	Sg6	S.0.02 /F.0.05	Sg6/F.0.03		r	O(F-120)	②D-Shape Tip only			
(S45C)	(S45C)	(S45C)	(S45C)	8	4.00~ 6.00	3.00~ 5.00	0.3~ 2.0		2	M4
KJPDTKM	KJPGDTKM	KJPDTK	KJPGDTK	10	4.00~ 8.00	3.00~ 7.00	0.3~ 3.0			
(S45C Hardened)	(S45C Hardened)	(S45C Hardened)	(S45C Hardened)	12	6.00~10.00	3.00~ 9.00	0.3~ 4.0		3	
KJPDTKMH	KJPGDTKMH		(	16	8.00~14.00	3.00~13.00	0.5~ 6.0	5~25	4	
			KJPGDTHK	20	12.00~18.00	5.00~17.00	1.0~ 8.0		6	
(SUS304)	(SUS304)	(SUS304)	(SUS304)	25	16.00~23.00	8.00~22.00	2.0~10.0	For SUS304.	8	M5
KJPDTKMS	KJPGDTKMS	KJPDIKS	KJPGDTKS	10L	10.00~16.00	5.00~15.00	1.0~ 7.0	B≤Sx5	4	
(SUS440C	(SUS440C	(SUS440C	(SUS440C)	12L	12.00~20.00	6.00~19.00	2.0~ 9.0	5_0//0	6	
Equivalent)	Equivalent)	Equivalent)	KJPGDTKC	16L	16.00~25.00	8.00~24.00	2.0~11.0		8	
KJPDTKMC	KJPGDTKMC	KJPDTKC	KJPGDIKC	20L	20.00~30.00	10.00~29.00	2.0~14.0		0	

Large Head Type (D=10L ~ 20L) is available for S45C only. 
 Please select S dimension so that S section is smaller than the diamond section.




			Round Tip Unit Price							②D-Shape Tip Unit Price							
D	)	S.0.02			S <sub>g6</sub>				S <sub>-0.02</sub> /F <sub>-0.05</sub>				S <sub>g6</sub> /F.0.03				
		KJPDTKM	KJPDTKMH	KJPDTKMS	KJPDTKMC	KJPGDTKM	KJPGDTKMH	KJPGDTKMS	KJPGDTKMC	KJPDTK	KJPDTHK	KJPDTKS	KJPDTKC	KJPGDTK	KJPGDTHK	KJPGDTKS	KJPGDTKC
	8																
	10																
Small	12																
Head	16																
	20																
	25																
	10L			-	-			-	-			-	-			-	-
Large	12L			-	-			-	-			-	-			-	-
Head	16L			-	-			-	-			-	-			-	-
	20L			-	-			-	-			-	-			-	-



Alterations	Code	Spec.
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied.  PApplicable to Material S45C only.  Combination with STC is not available.
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment.  • Applicable to Material S45C only.  Combination with MN is not available.
Engraving of the Specified Characters MISSAM0034	KF	Engraves alphabet or number. [Covers colo.] [Covers
Engraving of P Dimension	КН	Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary) .  Not applicable to handle length 10.  Engraved on the reverse side when combined with KF.

Alterations	Code	Spec.
5 Ø4 Chain Alterations	СН	Loss-proof chain (length 600mm) is attached to gauge body.  For chains only, see P1862.
No Relief Groove	ZC	Changes handle length to 10, 20, 30 or 40. [Ordering Date   CZCO [Ordering Date   CZCO [Ordering Date   CZCO  P. Bradle length 10 and 20 are available only when 2-5 and pin length   (10-8) : 30.  For Large Head Type, only ZC30 and 40 are applicable.  For handle length 10, there is no tapped hole.  For handle length 10, combination with KH is not available.

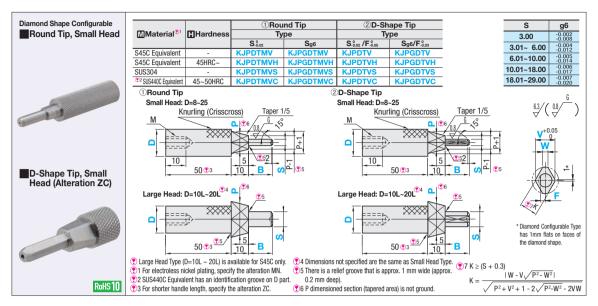



• Large Head Type (D=10L ~ 20L) is available for S45C only.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimensions so that S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section.

• Please select V, W and S dimension is smaller than the Diamond section is sm



		①Round Tip Unit Price								②D-Shape Tip Unit Price							
D	1	S.0,02				S <sub>g6</sub>				S.0.2 /F.0.05				S <sub>g6</sub> /F. <sub>0.03</sub>			
		KJPDTMV	KJPDTMVH	<b>KJPDTMVS</b>	KJPDTMVC	KJPGDTMV	KJPGDTMVH	KJPGDTMVS	KJPGDTMVC	KJPDTV	KJPDTVH	KJPDTVS	KJPDTVC	KJPGDTV	KJPGDTVH	KJPGDTVS	KJPGDTVC
	8																
	10																
Small	12																
Head	16																
	20																
	25																
	10L			-	-			-	-			-	-			-	-
Large	12L			-	-			-	-			-	-			-	-
Head	16L			-	-			-	-			-	-			-	-
	20L			-	-			-	-			-	-			-	-
$\overline{\Box}$	Part Number - P - S - F - B - V - W - (CH, KH-etc.)																

Alterations   Fig. 2   S6.00   Fig. 2							
Alterations	Code	Spec.					
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied.  • Applicable to Material S45C only.  Combination with STC is not available.					
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment.  Papplicable to Material S45C only.  Combination with MN is not available.					
Engraving of the Specified Characters	KF	Engraves alphabet or number. [Distency Distency Distency Distance					

Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary) .

Not applicable to handle length 10.

PEngraved on the reverse side when combined with KF.

Engraving of P Dimension

Alterations	Code	Spec.
5 04 Chain Alterations	СН	Loss-proof chain (length 600mm) is attached to gauge body.  §For chains only, see P.1862.
Handle Length	zc	Changes handle length to 10, 20, 30 or 40.  [Undering Dote] ZC20  (**) Handle length 10 and 20 are available only when P≥5 and pin length (10+B) ≤ 30.  (**) For Large Head Type, only ZC30 and 40 are applicable.  (**) For handle length 10, bene is no tapped hole.  (**) For handle length 10, combination with KH is not available.