

Driving Shafts


One End Stepped with Shoulder

■ **Features:** Rotary Shafts suitable for driving motion. Accuracies and shapes needed for rotary driving applications are selectable.



Type	D, P, Q Tolerance	Concentricity	M Material	H Hardness	S Surface Treatment
KZFN	h6	Ø0.01	S45C	-	-
KZFC					Black Oxide
KZFP			SUS304	Induction Hardened Surface Hardness 50HRC-	Electroless Nickel Plating
KZFS					-
KZFF			S45C		-

D	Tolerance h6	Circularity M
8	0	0.003
10	-0.009	
12, 12A	0	
15	-0.011	
17, 17A		0.005
20		
25	0	
30	-0.013	
35		
40	0	
45	-0.016	

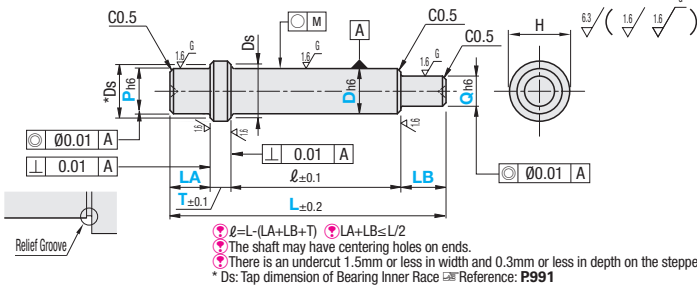

RoHS10

Part Number		0.5mm Increment	Selection	1mm Increment	0.5mm Increment	1mm Increment	0.5mm Increment	H	'Ds	
Type	D	L	T	P	LA	Q	LB			
KZFN KZFC KZFP KZFS KZFF	8	50.0~300.0	5	6~9	4.0~40.0	5~7	4.0~40.0	12	10	
	10		10	8~12	5.0~50.0	7~9	5.0~50.0	15	13	
	12		15	10~13					14	
	12A		20	12~18	5.0~60.0	7~11	5.0~60.0		16	
	15	100.0~400.0	10	12~18	5.0~75.0	10~14	5.0~75.0	20	18	
	17		15	14~18	5.0~100.0	10~16			19	
	17A		20	14~20		5.0~100.0		25	21	
	20		25	17~23	14~19			24		
	25		100.0~500.0	10	20~28	10.0~125.0	14~24	10.0~125.0	30	29
	30			20	25~33	15.0~150.0	20~29	15.0~150.0	35	34
	35	30		28~38	20~34		40		39	
	40	40		35~47	20~39	20.0~150.0	48			
45	50	35~48		20~44	50		49			



Ordering Example **Part Number** - **L** - **T** - **P** - **LA** - **Q** - **LB**
 KZFN30 - **350** - **T20** - **P30** - **LA50** - **Q25** - **LB30**

• **About KZFF (Induction Hardened)**

When alterations on the right-hand page are specified, the shafts are induction hardened (except the threaded sections) after machining.

As a result, these may occur:

- ①: Due to thermal conduction to the thread, the threads may be hardened by 2 ~ 3mm.
- ②: Induction Hardened may shrink the keyway width (around -0.01 ~ -0.02). If the key becomes hard to fit, adjust it by gauging.

Type	KZFN					KZFC					KZFP				
D	Min. L ~100.0	L100.5 ~200.0	L200.5 ~300.0	L300.5 ~400.0	L400.5 ~500.0	Min. L ~100.0	L100.5 ~200.0	L200.5 ~300.0	L300.5 ~400.0	L400.5 ~500.0	Min. L ~100.0	L100.5 ~200.0	L200.5 ~300.0	L300.5 ~400.0	L400.5 ~500.0
8				-	-				-	-				-	-
10				-	-				-	-				-	-
12				-	-				-	-				-	-
12A				-	-				-	-				-	-
15				-	-				-	-				-	-
17				-	-				-	-				-	-
17A				-	-				-	-				-	-
20				-	-				-	-				-	-
25															
30															
35															
40	-					-					-				
45	-					-					-				

Type	KZFS					KZFF				
D	Min. L ~100.0	L100.5 ~200.0	L200.5 ~300.0	L300.5 ~400.0	L400.5 ~500.0	Min. L ~100.0	L100.5 ~200.0	L200.5 ~300.0	L300.5 ~400.0	L400.5 ~500.0
8				-	-				-	-
10				-	-				-	-
12				-	-				-	-
12A				-	-				-	-
15					-					-
17					-					-
17A					-					-
20					-					-
25										
30										
35										
40	-					-				
45	-	-				-	-			


■ Selection of Driving Shaft

In selecting a driving shaft, select the basic shape and size from the specification table, then select necessary alterations such as thread machining, keyway addition etc.

<Selection Example of Part Number>

- Alteration Selection: Two Threaded Ends (Fine Thread, Precision Grade), Two Keyways

<App. Example>

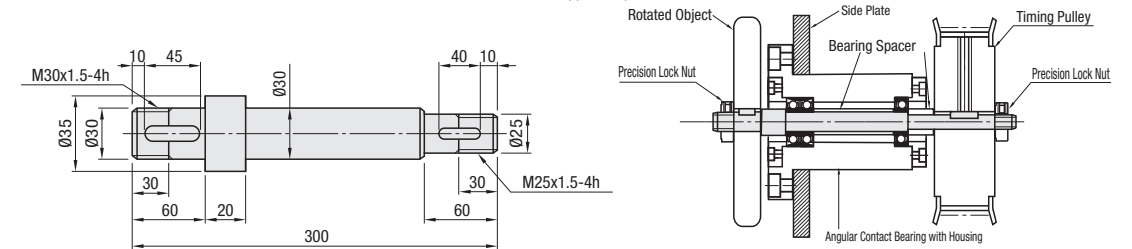

Alterations  Part Number - L - T - P - LA - Q - LB - (MA, NA, KA, TA, SA--etc.)
KZFF30 - 300 - T20 - P30 - LA60 - Q25 - LB60 - MMA30 - MMB30 - KA10 - HA45 - KB10 - HB40

Alterations		Code		Spec.																																																																																																																							
		Left End	Right End																																																																																																																								
Threaded Ends		MA MSA MMA MD MSD MMD	MB MSB MMB MD MSD MMD	Adds threads at shaft ends. Specify the length of the threads. (Accuracy, coarse or fine threads can be specified by ordering code.) [Ordering Code] MA15-MSB15 1mm Increment 5s Thread Length ≤Mx5, LA(LB)-2 <table> <tr> <th colspan="2">Code</th><th colspan="2">Screw Accuracy</th><th colspan="2">M (Coarse)</th><th colspan="2">M (Fine)</th><th colspan="2">Pitch</th><th colspan="2">M (Fine)</th><th colspan="2">Pitch</th></tr> <tr> <th>Left End</th><th>Right End</th><th>MA</th><th>MB MD</th><th>Coarse</th><th>JIS 6h (Class 2)</th><th>M5</th><th>0.8</th><th>M5</th><th>0.5</th><th>M25</th><th>1.5</th><th>M30</th><th>1.5</th></tr> <tr> <td>MSA</td><td>MSB MSD</td><td colspan="2">Fine (Standard)</td><td>JIS 6h (Class 2)</td><td>M8</td><td>1.25</td><td>M8</td><td>0.75</td><td>M35</td><td>1.5</td><td>M40</td><td>1.5</td></tr> <tr> <td>MMA</td><td>MMB MMD</td><td colspan="2">Fine (Precision)</td><td>JIS 4h (Class 1)</td><td>M10</td><td>1.5</td><td>M10</td><td>0.75</td><td>M45</td><td>1.5</td><td>M50</td><td>1.5</td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td>M12</td><td>1.75</td><td>M12</td><td>1.0</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td>M20</td><td>2.5</td><td>M20</td><td>1.5</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td>M24</td><td>3</td><td>M24</td><td>1.0</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td>M30</td><td>3.5</td><td>M30</td><td>1.0</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td><td>M36</td><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table> ♡ When D, P, Q=M, thread length can be specified. ♡ Specify Q diameter smaller than MD, MSD and MMD root diameter.	Code		Screw Accuracy		M (Coarse)		M (Fine)		Pitch		M (Fine)		Pitch		Left End	Right End	MA	MB MD	Coarse	JIS 6h (Class 2)	M5	0.8	M5	0.5	M25	1.5	M30	1.5	MSA	MSB MSD	Fine (Standard)		JIS 6h (Class 2)	M8	1.25	M8	0.75	M35	1.5	M40	1.5	MMA	MMB MMD	Fine (Precision)		JIS 4h (Class 1)	M10	1.5	M10	0.75	M45	1.5	M50	1.5						M12	1.75	M12	1.0										M20	2.5	M20	1.5										M24	3	M24	1.0										M30	3.5	M30	1.0										M36	4						
Code		Screw Accuracy		M (Coarse)		M (Fine)		Pitch		M (Fine)		Pitch																																																																																																															
Left End	Right End	MA	MB MD	Coarse	JIS 6h (Class 2)	M5	0.8	M5	0.5	M25	1.5	M30	1.5																																																																																																														
MSA	MSB MSD	Fine (Standard)		JIS 6h (Class 2)	M8	1.25	M8	0.75	M35	1.5	M40	1.5																																																																																																															
MMA	MMB MMD	Fine (Precision)		JIS 4h (Class 1)	M10	1.5	M10	0.75	M45	1.5	M50	1.5																																																																																																															
					M12	1.75	M12	1.0																																																																																																																			
					M20	2.5	M20	1.5																																																																																																																			
					M24	3	M24	1.0																																																																																																																			
					M30	3.5	M30	1.0																																																																																																																			
					M36	4																																																																																																																					
Tapped Ends		NA NB	NA NB	Adds taps on shaft ends. Select the thread diameter. [Ordering Code] NA5-NB5 ♡ NA,NB≤P(D)-4 <table> <tr> <th colspan="2">NA (Coarse)</th><th colspan="2" rowspan="2">NB (Coarse)</th></tr> <tr> <th colspan="4">Selection</th></tr> <tr> <td>M3</td><td>M4</td><td>M5</td><td>M6</td></tr> <tr> <td>M10</td><td>M12</td><td>M16</td><td>M20</td></tr> <tr> <td>M24</td><td></td><td></td><td></td></tr> </table>	NA (Coarse)		NB (Coarse)		Selection				M3	M4	M5	M6	M10	M12	M16	M20	M24																																																																																																						
NA (Coarse)		NB (Coarse)																																																																																																																									
Selection																																																																																																																											
M3	M4	M5	M6																																																																																																																								
M10	M12	M16	M20																																																																																																																								
M24																																																																																																																											
Keyway Machining		KA KB KC KD	KA KB KC KD	Adds a keyway. Specify the position and the length of the keyway. [Ordering Code] KA10-HA30-KB100-HB50 KA, HA, KB, HB, KC, HC, KD, HD = 1mm Increment ♡ 3≤HA,HB,HC,HD≤100 ♡ Keyway Details P820 ♡ When more than 2 keyways are added, the tolerances may shift by up to 0.2°. ♡ Specify the keyway position more than 2mm away from the shouldered or stepped part.																																																																																																																							
Keyway Machining + Set Screw Flat		ZA ZB ZC ZD	ZA ZB ZC ZD	Adds a flat at any designated angle based on the keyways. Specify the position and the length for each keyway, and the angle for the set screw flats. [Ordering Code] ZA40-HA20-AA90 ZA, HA, ZB, HB, ZC, HC, ZD, HD = 1mm Increment AA, AB, AC, AD = 30° Increment 30°≤AA, AB, AC, AD≤330° ♡ 3≤HA,HB,HC,HD≤100 ♡ Keyway Details P820 ♡ Specify the keyway position more than 2mm away from the shouldered or stepped part. • Ordering Code <table> <tr> <th>Keyway Position Specified</th><th>Keyway Width Specified</th><th>Angle Specified 30° Increment</th></tr> <tr> <td>ZA</td><td>HA</td><td>AA</td></tr> <tr> <td>ZB</td><td>HB</td><td>AB</td></tr> <tr> <td>ZC</td><td>HC</td><td>AC</td></tr> <tr> <td>ZD</td><td>HD</td><td>AD</td></tr> </table> D, P, Q 5 6~17 18~40 41~48 H 0.5 1 2 3 ♡ The length of each set screw flat is the same as that of each keyway. ♡ For a keyway and the angle of a set screw flat, the tolerances may shift by up to ±0.2°.	Keyway Position Specified	Keyway Width Specified	Angle Specified 30° Increment	ZA	HA	AA	ZB	HB	AB	ZC	HC	AC	ZD	HD	AD																																																																																																								
Keyway Position Specified	Keyway Width Specified	Angle Specified 30° Increment																																																																																																																									
ZA	HA	AA																																																																																																																									
ZB	HB	AB																																																																																																																									
ZC	HC	AC																																																																																																																									
ZD	HD	AD																																																																																																																									
Retaining Ring Groove		TA TB TD	TA TB TD	Adds a retaining ring groove. Specify the position of a retaining ring groove. [Ordering Code] TA10-TB100 TA, TB, TD = 1mm Increment 4≤TA(TB)≤LA(LB)-3 ♡ Retaining rings are included. ♡ For dimensions of the retaining ring groove, P820 ♡ P,Q=27,31,33,34,36~39, Not available for 41~44 and 46~48. <table> <tr> <th colspan="2">P, Q, D=3: Retaining Ring Type E</th><th colspan="2">P, Q=9, D=10: Retaining Ring Type C</th></tr> <tr> <th colspan="2">Driving Shafts</th><th colspan="2">Retaining Ring</th></tr> <tr> <th>Material</th><th>Hardness</th><th>Surface Treatment</th><th>Material</th></tr> <tr> <td>S45C</td><td>-</td><td>Black Oxide</td><td>Spring Steel</td></tr> <tr> <td></td><td></td><td>Electroless Nickel Plating</td><td></td></tr> <tr> <td>SUS304</td><td>-</td><td>-</td><td>SUS304-CSP</td></tr> <tr> <td>S45C</td><td>Surface 50HRC</td><td>-</td><td>Spring Steel</td></tr> </table>	P, Q, D=3: Retaining Ring Type E		P, Q=9, D=10: Retaining Ring Type C		Driving Shafts		Retaining Ring		Material	Hardness	Surface Treatment	Material	S45C	-	Black Oxide	Spring Steel			Electroless Nickel Plating		SUS304	-	-	SUS304-CSP	S45C	Surface 50HRC	-	Spring Steel																																																																																											
P, Q, D=3: Retaining Ring Type E		P, Q=9, D=10: Retaining Ring Type C																																																																																																																									
Driving Shafts		Retaining Ring																																																																																																																									
Material	Hardness	Surface Treatment	Material																																																																																																																								
S45C	-	Black Oxide	Spring Steel																																																																																																																								
		Electroless Nickel Plating																																																																																																																									
SUS304	-	-	SUS304-CSP																																																																																																																								
S45C	Surface 50HRC	-	Spring Steel																																																																																																																								
Wrench Flats		SA SH SB	SA SH SB	Adds a wrench flat. Specify the position of a wrench flat. [Ordering Code] SA5-SB10-SH SA, SB = 1mm Increment SA, SB ≥ 0 SA ≤LA-L, SB≤LB-L ♡ Specification of the length for SH is not necessary. Adds wrench flats on the shoulder. (ℓ=h) <table> <tr> <th>D</th><th>8</th><th>10</th><th>12</th><th>15</th><th>17</th><th>20</th><th>25</th><th>30</th><th>35</th><th>40</th><th>45</th></tr> <tr> <th>W</th><td>7</td><td>8</td><td>10</td><td>13</td><td>14</td><td>17</td><td>22</td><td>27</td><td>30</td><td>36</td><td>38</td></tr> <tr> <th>ℓ</th><td>8</td><td></td><td></td><td></td><td>10</td><td></td><td></td><td>15</td><td></td><td>20</td><td></td></tr> </table> <table> <tr> <th>P, Q</th><th>5</th><th>6</th><th>7</th><th>8~10</th><th>11~13</th><th>14~15</th><th>16~18</th><th>19~21</th><th>22~25</th><th>26~28</th><th>29~31</th><th>32~37</th><th>38~41</th><th>42~45</th><th>46~48</th></tr> <tr> <th>W1</th><td>4</td><td>5</td><td>5.5</td><td>7</td><td>10</td><td>13</td><td>14</td><td>17</td><td>19</td><td>22</td><td>27</td><td>30</td><td>36</td><td>38</td><td>41</td></tr> <tr> <th>ℓ</th><td></td><td></td><td></td><td>8</td><td></td><td></td><td>10</td><td></td><td></td><td></td><td>15</td><td></td><td></td><td>20</td><td></td></tr> </table>	D	8	10	12	15	17	20	25	30	35	40	45	W	7	8	10	13	14	17	22	27	30	36	38	ℓ	8				10			15		20		P, Q	5	6	7	8~10	11~13	14~15	16~18	19~21	22~25	26~28	29~31	32~37	38~41	42~45	46~48	W1	4	5	5.5	7	10	13	14	17	19	22	27	30	36	38	41	ℓ				8			10				15			20																																				
D	8	10	12	15	17	20	25	30	35	40	45																																																																																																																
W	7	8	10	13	14	17	22	27	30	36	38																																																																																																																
ℓ	8				10			15		20																																																																																																																	
P, Q	5	6	7	8~10	11~13	14~15	16~18	19~21	22~25	26~28	29~31	32~37	38~41	42~45	46~48																																																																																																												
W1	4	5	5.5	7	10	13	14	17	19	22	27	30	36	38	41																																																																																																												
ℓ				8			10				15			20																																																																																																													
2 Set Screw Flats (Angle Specified)		WA WB WD		Adds a flat at any designated angle besides the datum plane 0°. Specify the position, the length and the angle of the set screw flats. When 0° is specified, only one set screw flat is machinable. [Ordering Code] WA15-GA10-AAO WA, WB, WD, GA, GB, GD= 1mm Increment AA, AB, AC = 30° Increment 0°≤AA, AB, AC≤330° • Ordering Code <table> <tr> <th>Set Screw Flat Position Specified</th><th>Set Screw Flat Width Specified</th><th>Angle Specified 30° Increment</th></tr> <tr> <td>WA</td><td>GA</td><td>AA</td></tr> <tr> <td>WB</td><td>GB</td><td>AB</td></tr> <tr> <td>WD</td><td>GD</td><td>AC</td></tr> </table> D, P, Q 5 6~17 18~40 41~48 H 0.5 1 2 3	Set Screw Flat Position Specified	Set Screw Flat Width Specified	Angle Specified 30° Increment	WA	GA	AA	WB	GB	AB	WD	GD	AC																																																																																																											
Set Screw Flat Position Specified	Set Screw Flat Width Specified	Angle Specified 30° Increment																																																																																																																									
WA	GA	AA																																																																																																																									
WB	GB	AB																																																																																																																									
WD	GD	AC																																																																																																																									
Tolerance Change		DJ (js6) DK (k6)		Changes the D dimension tolerance to js6 or k6. [Ordering Code] DJ or DK																																																																																																																							