


L-Shaped Angles

Milled Surfaces, Outside Corner Perpendicular Rough, Dimension Configurable



Type	Material
LASR	SS400
LAAR	A6063
LAUR	SUS304

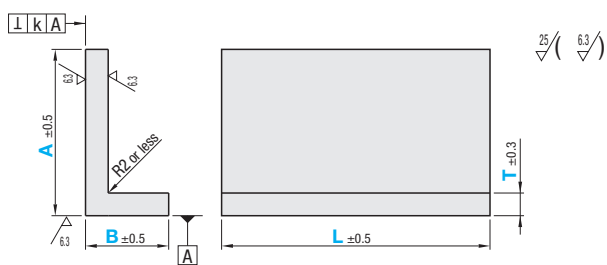

T Dimension	Long sides of A and B dims.	Perpendicularity k
5,6	20~75	0.2
8	50~75	0.35
10	25~75	0.2
	76~100	0.3
	101~125	0.35

Part Number		T	A	B	L	Unit Price					
Type						Min. L ~ 50	L51~100	L101~150	L151~200	L201~250	L251~300
LASR (SS400)	5	6	25~50	25~50	25~300						
		10	51~75	25~50							
	10	6	25~50	30~50							
		10	51~75	30~50							
		10	76~100	30~50							
		10	51~75	51~75							
		10	76~100	51~75							
		10	101~125	51~75							
		10	76~100	76~100							
		10	101~125	76~100							
		10	101~125	101~125							
		10	101~125	101~125							

Part Number		T	A	B	L	Unit Price					
Type						Min. L ~ 50	L51~100	L101~150	L151~200	L201~250	L251~300
LAAR (A6063)	5	6	20~50	20~50	25~300						
		10	51~75	20~50							
	10	6	51~75	51~75							
		10	30~50	30~50							
		10	51~75	30~50							
		10	50	30~50							
		10	51~75	30~50							
		10	76~100	30~50							
		10	51~75	51~75							
		10	76~100	51~75							
		10	76~100	76~100							
		10	76~100	76~100							

Part Number		T	A	B	L	Unit Price					
Type						Min. L ~ 50	L51~100	L101~150	L151~200	L201~250	L251~300
LAUR (SUS304)	5	6	20~60	25~50	25~300						
	6	6	60~75	25~50							
	8	6	51~75	51~75							
	8	8	51~75	51~75							

Ordering Example: Part Number - A - B - L
LASR10 - A100 - B100 - L300

Alterations: Part Number - A - B - L - (CKC, CCA, CCB, etc.)
LASR10 - A100 - B50 - L50 - CKC

Alterations	Corner Cut		Side perpendicularity guaranteed	
Code	CCA, CCB, CCC, CCD		CKC	
Spec.	Any corner can be cut. 1≤ Corner Cut ≤30: 1mm Increment [Ordering Code] (Ex.) When A and D are cut with C5→CCA5-CCD5		Both sides of dimension L are machined to be perpendicular to surface A. [Ordering Code] CKC	


L-Shaped Angles

Milled, Inside Unmilled, Outside Corner Perpendicular, Dimension Configurable



Type	Material
LSS	SS400
LSA	A6063

✓ areas and SS400 products are shot blasted.
⚠ A6063 surfaces are "as extruded".

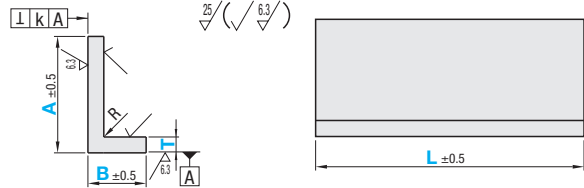

Part Number		T	T Tolerance	1mm Increment		
Type				A	B	L
LSS	5	6	±0.5	25~75	25~75	25~300
	10	6	±1.0	25~125	25~125	
	12	6	±1.0	101~150	101~150	
	15	6	±1.5	151~175	151~175	
	15	6	±1.5	151~175	151~175	
LSA	5	6	±0.5	25~75	25~75	25~300
	10	6	±1.0	25~125	25~125	
	12	6	±1.0	101~125	101~125	
	12	6	±1.0	101~125	101~125	
	12	6	±1.0	101~125	101~125	

Long sides of A and B dims.	Perpendicularity k	Long sides of A and B dims.	T	R	
				LSS	LSA
25~80	0.05 or Less	25~60	5	8.5~10	1 or Less
81~150	0.10 or Less	61~75	6		6~8
151~175	0.15 or Less	25~50			8~9
		51~75		12	
		25~60	10	10~14	0.3
		61~150	12		
		25~60			
		61~150			
		151~175	15	16~18	-

Part Number	A	B	Unit Price																
			LSS5, LSS6						LSS10				LSS12				LSS15		
			L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L50-100	L101-150	L151-200	L201-250	L251-300
LSS5 LSS6 LSS10 LSS12 LSS15	25-50	25-50													-	-	-	-	-
	51-75														-	-	-	-	-
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	25-50	51-75													-	-	-	-	-
	51-75														-	-	-	-	-
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	25-50	76-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
25-50	101-125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
126-150	126-150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
126-150		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
151-175		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Part Number	A	B	Unit Price																
			LSA5, LSA6						LSA10						LSA12				
			L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L51-100	L101-150	L151-200	L201-250	L251-300
LSA5 LSA6 LSA10 LSA12	25-50	25-50													-	-	-	-	-
	51-75														-	-	-	-	-
	76-100		-	-	-	-	-	-							-	-	-	-	-
	25-50	51-75													-	-	-	-	-
	51-75														-	-	-	-	-
	76-100		-	-	-	-	-	-							-	-	-	-	-
	25-50	76-100	-	-	-	-	-	-							-	-	-	-	-
	51-75		-	-	-	-	-	-							-	-	-	-	-
	76-100		-	-	-	-	-	-							-	-	-	-	-
101-125	101-125	-	-	-	-	-	-							-	-	-	-	-	

Ordering Example: Part Number - A - B - L
LSS5 - A25 - B25 - L100

Alterations: Part Number - A - B - L - (CKC, CCA, CCB, etc.)
LSS10 - A100 - B50 - L50 - CKC

Alterations	Corner Cut		Side perpendicularity guaranteed	
Code	CCA, CCB, CCC, CCD		CKC	
Spec.	Any corner can be cut. 1≤ Corner Cut ≤30: 1mm Increment [Ordering Code] (Ex.) When A and D are cut with C5→CCA5-CCD5		Both sides of dimension L are machined to be perpendicular to surface A. [Ordering Code] CKC	