

Points of comparison against similar products


For Load Rating and Nut dim., C-VALUE components are different from the similar products. (For details, see P.763-P.764.)
When considering adopting C-VALUE parts, select them by comparing against similar products in the specifications.

Similar Product Pages [P.763~P.764](#)




Nut Type	Type		Accuracy Grade	Shaft Dia.	Lead	Screw Shaft			Nut		
	Standard	F, P Configurable				M Material	H Hardness	S Surface Treatment	M Material	H Hardness	S Surface Treatment
Standard Nut	C-BSST	C-BSSTK	C7	32	5, 10, 32	S55C	Induction Hardened 58 ~ 62HRC	-	SCM415	Carburized 58~62HRC	-
	C-BSSC	C-BSSCK	C10								


C-BSSC(K), C-BSST(K)3205

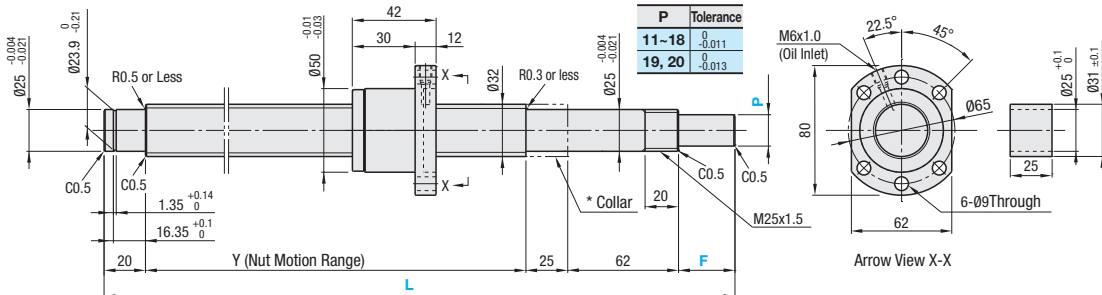

C-BSSC(K), C-BSST(K)3210

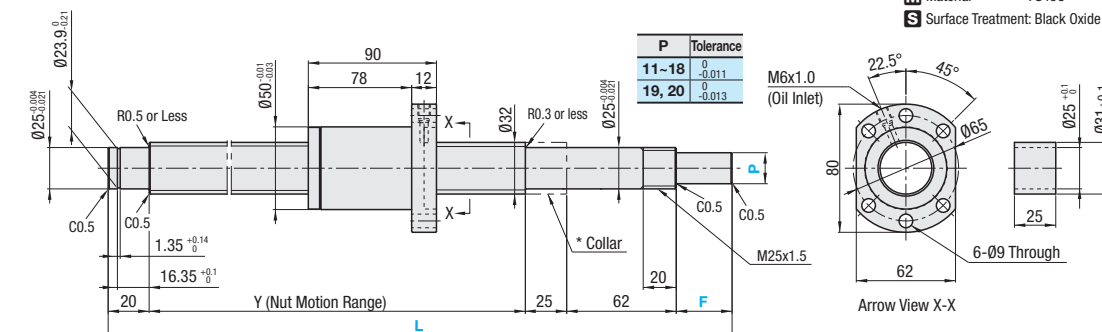

C-BSSC(K), C-BSST(K)3232

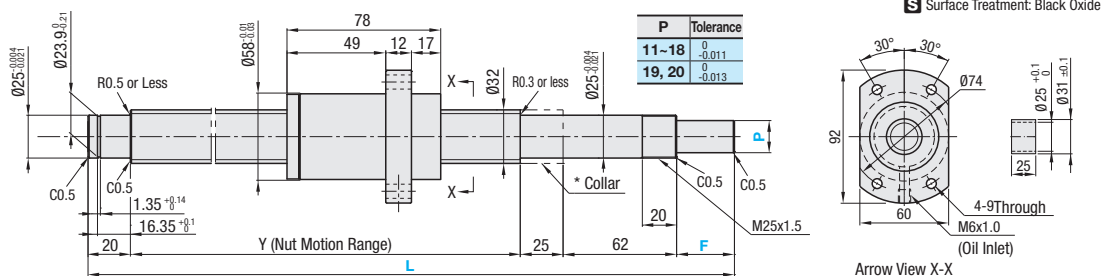

Nut Type	Accuracy Grade	Part Number	1mm Increment	Y	Ball Dia.	Ball Center Dia.	Screw Root Dia.	Number of Circuits	Basic Load Rating	Axial Play Clearance	Twist Direction
		Type	Screw Shaft O.D.	Lead	L	*F	*P		C (Dynamic) kN	Co (Static) kN	
Standard Nut	C7	C-BSST	32	5	250~2000	33	20	L-140	6.3	20.7	0.10 or Less
	C10	C-BSSTK				33~60	11~20	L-(107+F)			0.20 or Less
	C7	C-BSSC				33	20	L-140			0.14 or less
	C10	C-BSSCK				33~60	11~20	L-(107+F)			0.20 or Less
	C7	C-BSST				33	20	L-140			0.14 or less
	C10	C-BSSC				33	20	L-140			0.20 or Less
	C7	C-BSSTK	32	10	300~2000	33~60	11~20	L-(107+F)	10.2	27.2	0.14 or less
	C10	C-BSSCK				33	20	L-140			0.15 or Less
	C7	C-BSST				33~60	11~20	L-(107+F)			0.14 or less
	C10	C-BSSC				33	20	L-140			0.15 or Less
	C7	C-BSSTK				33~60	11~20	L-(107+F)			0.15 or Less
	C10	C-BSSCK				33~60	11~20	L-(107+F)			0.15 or Less

* F and P are configurable for C-BSSCK, C-BSSCK only. * F≤Px3 * Y (Nut Motion Range) > (Nut Overall Length)

kgf=Nx0.10192

Nut Type	Accuracy Grade	Part Number	Unit Price 1 ~ 4 pc(s).					
			L200~400	L401~600	L601~800	L801~1000	L1001~1200	L1201~1500
Standard Nut	C7	C-BSST3205						
	C10	C-BSSC3205						
	C7	C-BSST3210						
	C10	C-BSSC3210						

* For the price of F, P Configurable Type, add the relevant surcharge to the standard type price.



Part Number	L	F	P
C-BSSC3205	600		
C-BSSCK3232	888	F40	P15

- Notes**
- * Filled with lithium soap based grease (Alvania Grease S2 made by Showa Shell Sekiyu K.K.).
 - * For accuracy of Ball Screws, see **P.697** and **700**.
 - * For details of Support Units, see **P.771~P.796**.
 - * Cautions: Do not let the nuts overrun or remove the nuts from the screw shafts. It may cause the balls to fall out or damage the ball recirculation parts.
 - * The collar included with this product should be installed in the same position as indicated with the "Collar" text on the drawing. In addition, the collar included with the Support Unit product should be installed and tightened on the nut side of the ball screw.
 - * Note that, when a ball screw shaft or ball screw nut is tilted, it may be fallen out by its own weight.




Part Number	L	F	P	(FC, KC...etc.)
C-BSST3205	680			KC10

Alterations	Code	Spec.
No Machining on Both Shaft Ends (Annealing Range) 4-C Nut Ordering Code: WNC-S20-F80 * A nut is mounted to the temporary shaft before shipment.	WNC	Does not machine any of the both shaft ends. Ordering Code: WNC-S20-F80 * Annealing may lower hardness on the annealed area + 25mm fore and aft. * S+F≤L/2 * L-(S+F)≥Y+50 * On the annealed area + 25mm fore and aft, axis run-out may be larger than indicated by the Catalog standard.
No Machining on Support Side Shaft End	NC	No machining added on the support side shaft end. Ordering Code: NC
Ball Nut Orientation Reversed (Support Side) (Fixed Side) Standard or Change	RLC	Changes the nut direction. Ordering Code: RLC
No Retaining Ring Groove on Support Side Shaft End	RNC	No Retaining Ring Groove on Support Side Shaft End Ordering Code: RNC * Combination with FC is not available.
Change Support Side Shaft End Machining	GC	Changes the machining on the support side. Q is selectable from 10, 12, 15, 20. G=1mm Increment Ordering Code: GC-Q10-G20 * 5≤G≤Qx3 * Y dimension is shortened. * No Retaining Ring Groove. * Combination with FC is not available.
Change Support Side Shaft End Length	FC	Changes the length of the support side shaft end. FC=1mm Increment Ordering Code: FC20 * 19≤FC≤60 * Y dimension is shortened. * Combination with GC is not available.
Tapped Hole on Support Side Shaft End	MC	Adds a tapped hole on the support side shaft end. MC=1mm Increment Ordering Code: MC40 M 20 * Y dimension is shortened. M8x1.25 20 * 28≤MC≤60

Alterations	Code	Spec.
Wrench Flats on Fixed Side Ordering Code: SZC Incomplete Hardened Area	SZC	Adds wrench flats on the fixed side shaft end. Ordering Code: SZC * Ball bearings will fall out if the ball nut crosses the wrench flats.
Keyway on Fixed Side Shaft End Detailed Keyway Dimensions P.700	KC	Adds a keyway on the fixed side shaft end. KC=1mm Increment Ordering Code: KC20 * 5≤KC≤Px3 KC≤F-1
Keyway on Fixed Side Shaft End	KLC	Adds a keyway at a customer specified area on the fixed side shaft end. (Keyway dim. is same as that of KC.) K, S=1mm Increment Ordering Code: KLC-K20-S3 * 6≤K+S≤Px3 K+S≤F-1
Flat Machined on Fixed Side Shaft End	SC	Adds a flat on the fixed side shaft end. SC=1mm Increment Ordering Code: SC20 * 5≤SC≤Px3 SC≤F-1
2 Flats Machined on Fixed Side Shaft End SWC, SGC Ordering Code: SWC10, SGC10 * 5≤SWC, SGC≤Px3 SWC, SGC≤F-1	SWC, SGC	Adds two flats on the fixed side shaft end. SWC: 90° Position SGC: 120° Position 1mm Increment Ordering Code: SWC10, SGC10 * 5≤SWC, SGC≤Px3 SWC, SGC≤F-1
Installing Special Temporary Shaft Temporary Shaft Nut Screw Shaft	TAS	Special Temporary Shafts suitable with Ball Screws are installed. When removing Nut from Screw Shaft, always use Special Temporary Shaft. * For installation method, see P.701 .

Peripherals: Combination of the following parts is available.

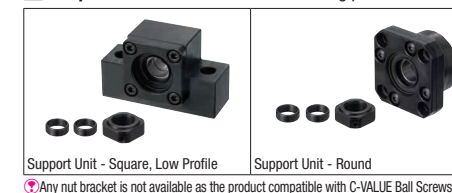

Combination with Support Units

Ball Screw Part Number			Recommended Support Unit			
Type	Screw Shaft O.D.	Lead	Part Number Type	No.	Shape	Page
C-BSSC C-BSST	32	05 10 32	C-BRW	25	Square	P.781
			C-BUR			P.782
			C-BBW			P.787
			C-BUN		Round	P.788

* Other than the part numbers shown above, a rich variety of Support Units are also available. (P.779~P.796)