

M-PSPM RoHS


● Photo before assembly



● Photo after assembly



ⓘ This product is delivered exploded. Assemble it before use. (For assembly details, refer to lower right of this page.)

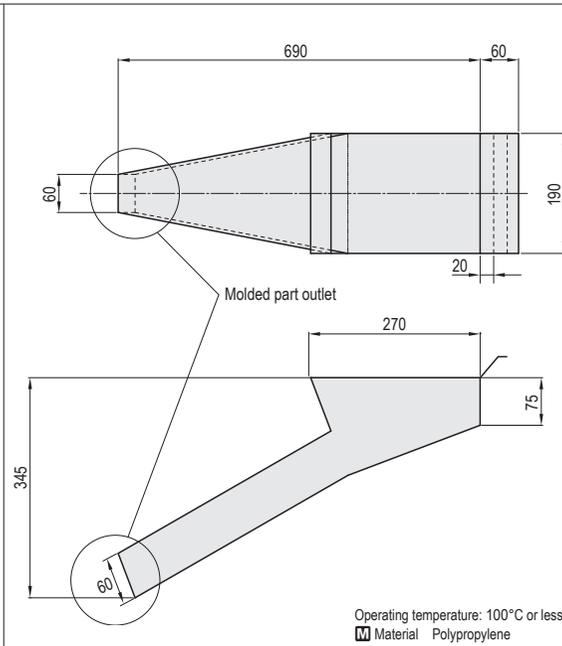

Product Shooter

- It is a tool for conveying molded products to be taken out by dropping to a container, etc.
- Install it in a space under the molding machine according to the location where the molded product is dropped.

ⓘ Use it for molded products that are smaller than the outlet size of the shooter.

Features

- Dust does not easily adhere thanks to the antistatic effect of polypropylene.
- As it is made of plastic, it can be wiped off if it gets dirty. If the dirt is severe, it can be wiped off with water and a neutral detergent.

Part Number	Unit price
	1~9 pcs
M-PSPM	Quotation

Order **Part Number**
M-PSPM


Days to Ship **Quotation**

Quantity Discount Rate

Order Quantity	Standard Service			Non-Standard Service - Large Quantity
	1-9	10-19	20-29	30-
Quantity	Standard	5%	10%	To be quoted
Rate				


ⓘ Please check with our WOS for the purchase order that exceeds the displayed quantity.

Example

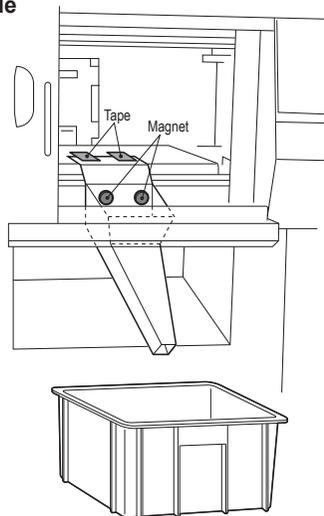


Set it under the molding machine.


How to Assemble

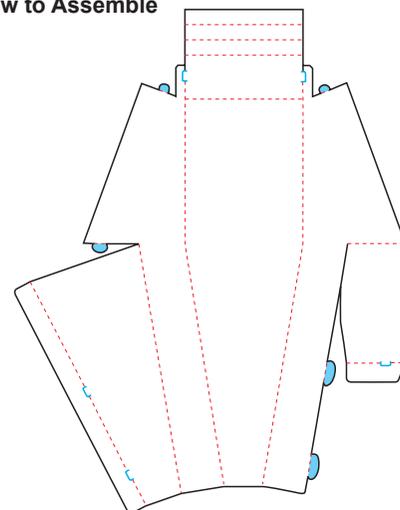


- Red dashed lines in the figure above are valley folds.
- Insert the blue margin part shown above into the notch indicated by the blue solid line.

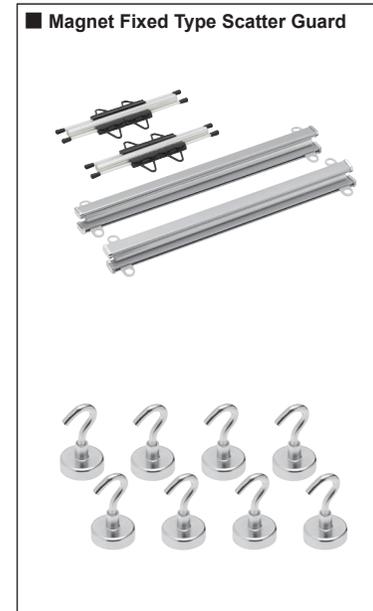

M-KSD200

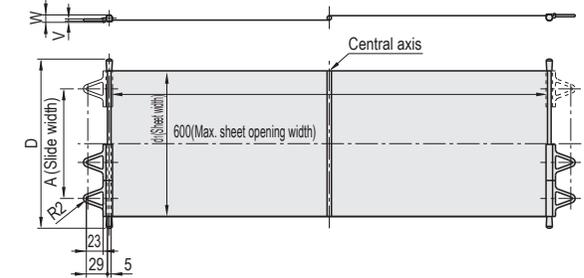

M-KSD300 M-KSD400 M-KSD500 M-KSD600

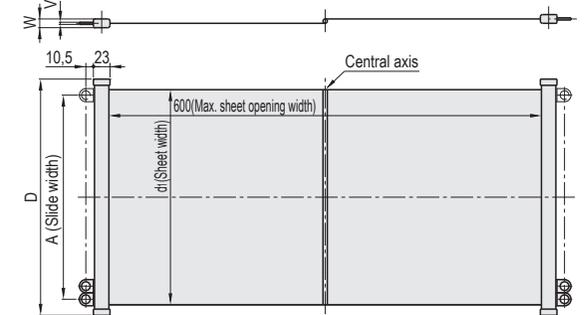

ⓘ M-KSD500 and M-KSD600 have 3 rings on one side for magnet hook.

Material Film: PET

Magnet Fixed Type Scatter Guard

A	d1	W	V	Part Number		Unit price
				Type	D	1~3 pcs
149	198	10	3	M-KSD	200	Quotation
280	295	12	3		300	
380	395				400	
480	495				500	
580	595				600	

- Comes with two films on operation side and reverse operation side
- Comes with eight magnets

Order **Part Number**
M-KSD-200
M-KSDM8

Days to Ship **Quotation**

Magnet (separate)

Quantity (pcs)	Material	Part Number	Unit price
8	Neodymium	M-KSDM8	Quotation

Application

- Attach four magnets to the molds on both the fixed side and movable side while the operation is stopped before molding.
- Attach the scatter guard to the hook of the magnet to complete installation.

Features

- Firmly guards the molded parts from scattering.
- The transparent film enables confirmation of the interior.
- It is a type fixed with a magnet, making adjustment, relocation, opening and closing easy.